



# XTREME BAR SERIES

## 6001A XTREME SERIES BAR 12" MINI STROBE LIGHT BAR

### FEATURES & SPECIFICATIONS:

- Power@12V: 44.4W / 3.7A
- Power@24V: 45.84W / 1.91A
- Voltage: 12 - 24V DC
- Dimension (H,W,D): 2.1"x 11" x 6.4"
- Color: Amber
- Flash Pattern: 26
- Lead Length: 9.5'
- Connections: Cigarette & Dash Mount Switch
- Mounting: 2x 60 lb Magnetic Mount & Permanent Mount
- Compliance: SAE J845 CLASS I Rated
- UV & Shock Resistant
- IP66 rating make it durable
- 3 Year Warranty

### WHAT'S INCLUDED



Light bar with magnet feet



Permanent mount bracket




Cigarette lighter switch

Permanent mount switch

### FLASH PATTERNS


1	Single flash	14	CCW**/quick
2	Double flash	15	CW*/Steady on
3	Side to Side	16	CCW**/Steady on
4	Diagonal	17	CW*/constant flash
5	Rotating(CW)*	18	CCW**/constant flash
6	Rotating(CCW)**	19	CCW** - CW* constant flash - alternate
7	Quick/side to side	20	Single
8	Quick/single/quad	21	Double + rotating
9	Triple flash	22	One - one single flash
10	Quad flash	23	One - one eight flash
11	Eight flash	24	Half Steady Half Single
12	Twelve flash	25	Half Steady Half Single
13	CW*/quick	26	Steady on

# MOUNTING INSTRUCTIONS

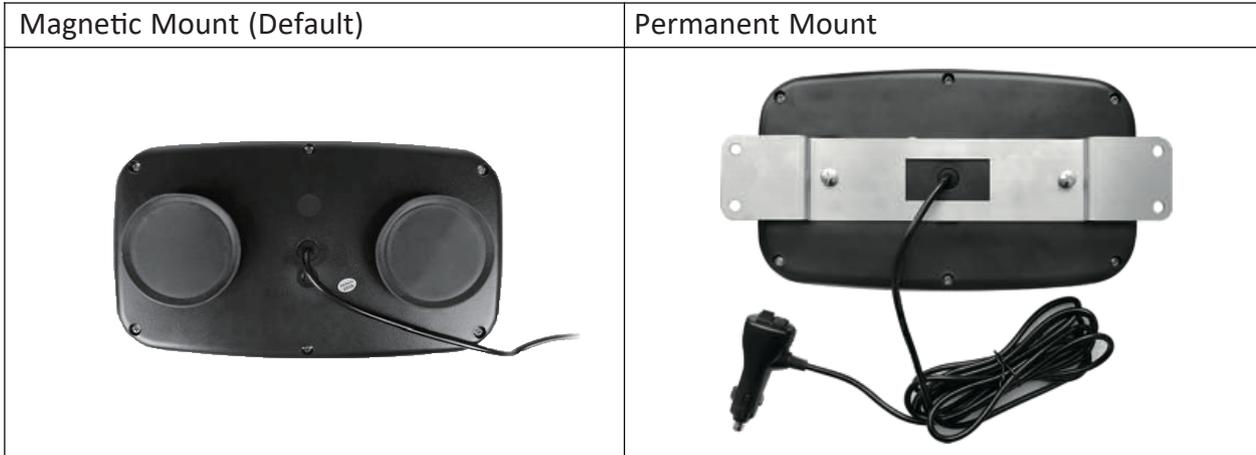

1. magnetic feet are mounted by default on the light bar. To switch to the permanent mount, the magnetic feet need to be removed.
2. Unscrew the magnetic feet by turning counter clockwise.  
Use the same bolt and washer of the magnetic feet to mount the light bar to the stainless steel mounting bracket.
3. Use 4 bolts of proper length (not provided) to mount the stainless steel plate to the vehicle.

# WIRING INSTRUCTION

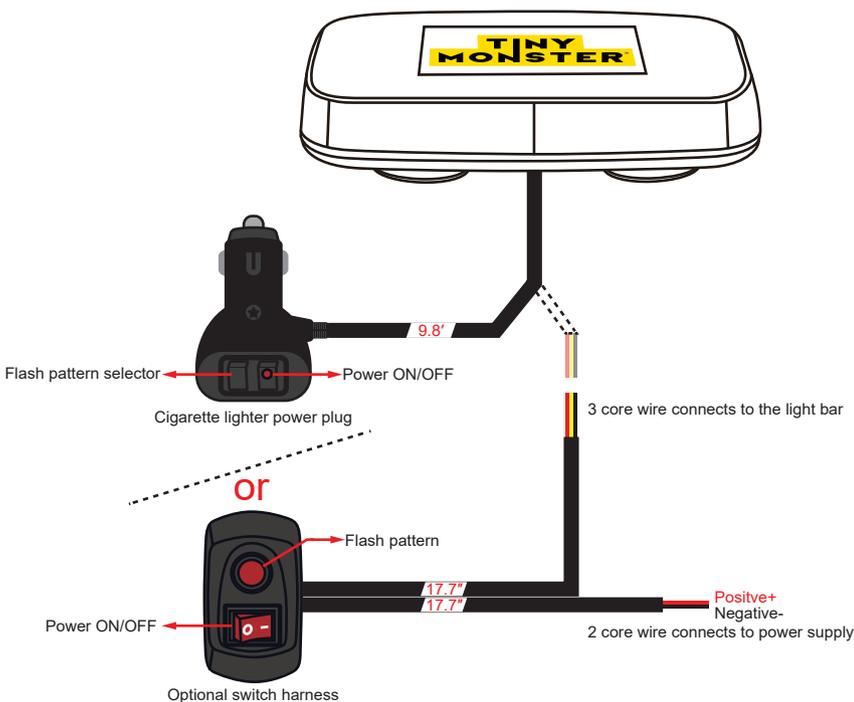

WIRING DESIGNATIONS
Red: +VDC
Black: Ground
Yellow: Signal

If you choose to use the permanent mount, please follow the following steps:

1. Cut the cigarette light switch off.
2. There are two cables out of the permanent mount switch. Connect the wire with 3 wires to the cigarette mount as the diagram on the left.
3. Connect the wire with 2 wires to the power supply